

Specifications

MODELS

Code	Power supply		Current
	Power	Logic	
SW5A9052	85 ÷ 265 Vac single phase or 3 phases	24 Vdc (mandatory)	5.20 Arms (7.3 Apk) (up to 8Arms @120Vac max)

EMULATED STEP RESOLUTION

Stepless Control Technology (65536 position per turn)

COMMUNICATION INTERFACES

EtherCAT, Modbus TCP/IP, CANopen, Modbus RTU and Profinet

ENCODER INTERFACES

incremental encoder input 5V differential RS422 or single-ended TTL/CMOS (isolated)
encoder output 5V differential RS422 (isolated)
absolute encoder input SSI or BISS-C (isolated)

SCI INTERFACE

SCI service interface for programming and real time debug

OPTOCOUPLED INPUTS

4 or 16 digital inputs

OPTOCOUPLED OUTPUT

3 or 12 digital outputs

ANALOG INPUTS

up to 2 analog inputs

ANALOG OUTPUT

up to 2 analog outputs

OPTOCOUPLED STO INPUTS

Safe Torque Off inputs

SAFETY PROTECTIONS

over/under-voltage, over current, overheating, short circuit between motor phase to phase and phase to ground

TEMPERATURES

working from 5°C to 40°C, storage from -25°C to 55°C


HUMIDITY

5% ÷ 85% not condensing

PROTECTION CLASS

IP20

Open-Loop / Closed-Loop

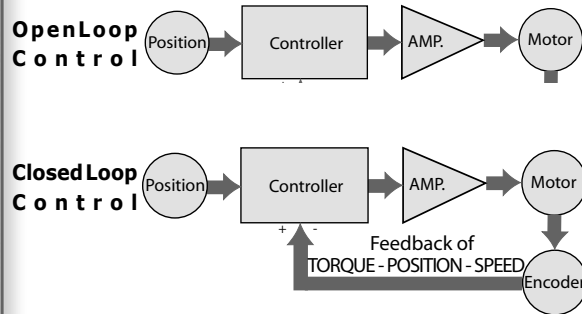

Better control compared to both an open loop stepper solution and a servo-controlled brushless solution

Programmable vectorial drivers for 2 phases stepper motors

TITANIO
VECTOR - STEPPER - DRIVES

CE **RU** **US**



EtherCAT

Modbus TCP/IP

CANopen

Modbus

PROFINET


SW5A9052

- Can be powered from the main AC supply (230 Vac)
- Vectorial control
- Safe Torque Off inputs (STO) SIL3/PLe
- Several fieldbus
- Serial Service for real time programming and debugging
- New e3PLC Programming Environment, easy and intuitive

Ever
ELETRONICA
the clever drive


ELETRONICA PER AUTOMAZIONE INDUSTRIALE
Via del Commercio, 2/4 - 9/11
Loc. S. Grato - Z.I.
26900 - LODI (LO) - Italy
Tel. +39 0371 412318 - Fax +39 0371 412367
email infoever@everelettronica.it
www.everelettronica.it

Step & Direction or Analog

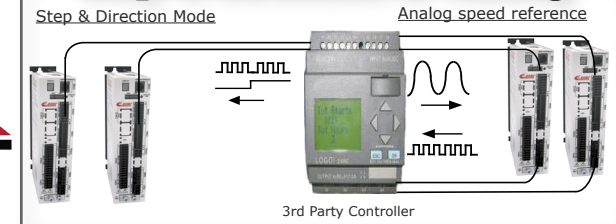

Multi Axes Systems

- Slave mode - c0380 CANopen DS402
- c0680 EtherCAT
- c0790 CANopen + Modbus
- c0890 Modbus TCP/IP
- c0990 Profinet

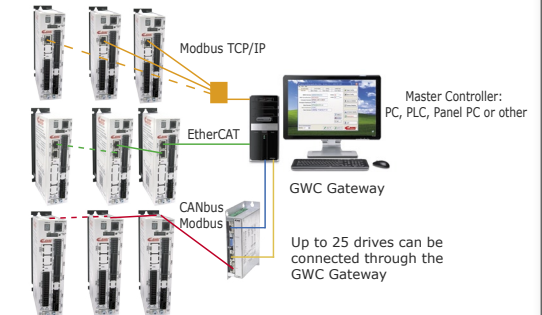


Drive control through commands by Master Controller. Suitable for multi axes systems (up to 127 drives). Built in powerful Motion Module functionality assures perfect synchronization among axes and reduces Master Controller workload.

Stand Alone Mode

User Programmable - e3PLC- c0690 / c0790 / c0890 / c0990

FIELDBUS DRIVES WITH AUTONOMOUS FUNCTIONING that, by integrating advanced PLC and motion controller functions in one single device, programmable by the user with the IDE for Windows PC and e3PLC, allows to reduce the traditional machine control solution.

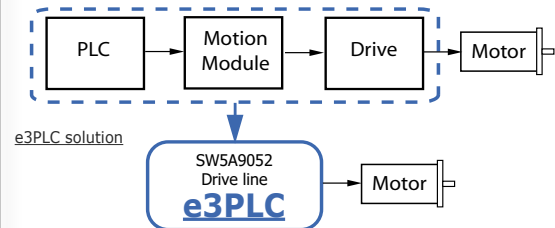


The e3PLC IDE allows the user to access all the I/O control functions and resources, provided by the drive, and to locally program its Motion Control Module, which can also be synchronized with other drives and events of the controlled process. Thanks to the advanced functionalities of the Power Motion Module, an integrated Real-time Process Module, applications can be easily created for special applications such as:


- Labelling
- Electronic cams
- Control Sequences of cable processing
- Many other user-customized processes ...

Configuration software

Fieldbus configuration (slave)

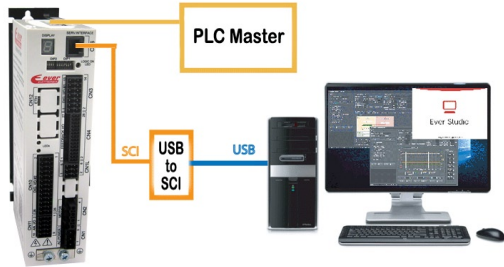

IDE e3PLC configuration (programmable)

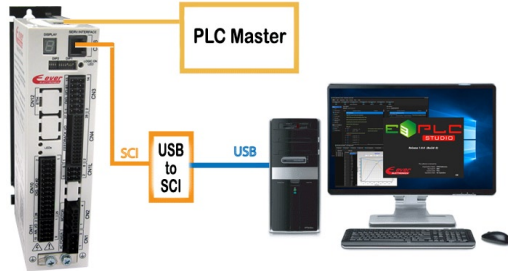

Ever co. proprietary PC Software Tools for easy and quick configuration or programming, real time debug and supervision of each system

Autonomous management of the firmware for the execution of the **homing**, of the target movement with relative or absolute quota and for the generation of the ramp profiles

Torque mode for operation with torque limitation

Speed control thanks to digital inputs, analogue inputs or fieldbus

Electronic CAM with advanced programming of internal profiles inside the drive


Electric shaft with encoder or analogue input with variable tracking ratio (Electric Gear)

Fast inputs and outputs for motor' start & stop and event synchronization for high speed response applications such as labeling, nick finder, flying saw etc.

Possibility to synchronize the movements in multi-axis systems, even without fieldbus

Enabling and on-the-fly changing of the motion control modes

Mechanical Data

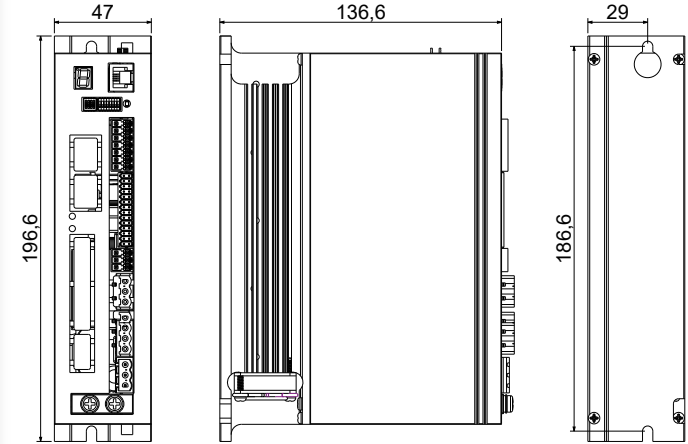

Models	Dimensions (mm)			Weight (g.)
	H	L	W	
SW5A9052xxxx-30	196.6	136.6	47.0	550

Ordering Information for SW5A9052 Drives

Ordering code		Power			System Resources														
Versions	Config.	Power Supply	Logic Power Supply	Current	Digital Inputs	Digital Outputs	Analog Inputs	Analog Outputs	STO Inputs	Interface	SCI Interface	Control Mode							
SW5A9052 Drives Line																			
SW5A9052N221-30	c0790-S0200 c0790-S0301	85 ÷ 265 Vac	24 Vdc (mandatory)	0 ÷ 5.2 Arms (0÷7.3 Apeak) (up to 8 Arms @120Vac max)	4	3	0	0	YES	---	For configuration, programming and real time debug	Clock & Direction							
SW5A9052N2E1-30	c0790-S0302				4	3	1	0	YES	---		Indexer							
SW5A9052L221-30	c0380				4	3	0	0	YES	CANbus Canopen + Serial Modbus		e3PLC CANopen + Modbus							
	c0790				4	3	0	0					e3PLC CANbus + Modbus						
SW5A9052L2E1-30	c0380				4	3	1	0					Ethernet Modbus TCP/IP	Fieldbus CANbus DS402					
	c0790				4	3	1	0							e3PLC CANbus + Modbus				
SW5A9052L2G1-30	c0380				16	12	2	2							YES	Fieldbus CANbus DS402			
	c0790				16	12	2	2									e3PLC CANbus + Modbus		
SW5A9052E221-30	c0890				4	3	0	0									YES	Ethernet Modbus TCP/IP	e3PLC Modbus TCP/IP
SW5A9052E2G1-30	c0890				16	12	2	2									YES	Ethernet Modbus TCP/IP	e3PLC Modbus TCP/IP
SW5A9052H221-30	c0680				4	3	0	0									YES	EtherCAT (CoE)	Fieldbus EtherCAT
	c0690				4	3	0	0									YES		e3PLC EtherCAT
SW5A9052T221-30	c0990	4	3	0	0	YES	Profinet	e3PLC Profinet											

Configuration and Programming Kits

Kit code	Description
SW5_SERV00-SL	SCI configuration communication kit with cables, service serial to RS485 and RS485 to USB converters and CD-Rom.
SW5_SERV00-EE	SCI service e3PLC programming with cables, service serial to RS485 and RS485 to USB converters and CD-Rom.